



EU-TYPE EXAMINATION CERTIFICATE



The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

Certificate N° 0075/4837/162/11/23/1991

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

Manufacturer : blizz-z Handwerk Direkt GmbH
Sommerauer Str. 14 | 91555 Feuchtwangen
Germany

Description

PPE Type : *protective glove against mechanical risks*

Product reference : 194508, 194509, 194510, 194511

Article code : /

Glove description : 15 gauge nylon and spandex liner, with black nitrile coating, sandy finish

Available sizes : 8/M(194508), 9/L(194509), 10/XL(194510), 11/XXL(194511)

Pictures :

blizz-z

194508

SIZE 8 M



SOMMERAUER STR.14|
91555 FEUCHTWANGEN
GERMANY



Reference standard :

Levels of performance / class of protection

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.
« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

EN ISO 21420:2020

-

EN 388:2016 + A1:2018

4 1 2 1 X

At the date of the certificate, the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file and the user instructions index 01 dated from NOVEMBER 2023.

NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425. Any marking on the PPE which is not concerned by the Regulation (UE) 2016/425, is not covered by this certificate.

Issued in Lyon by
William GELAS
Certification manager



Date of first issue: 28 November 2023
Date of end of validity: 28 November 2028



In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC.



Accreditation n° 5-0594
Scope available on:
www.cofrac.fr

www.ctcgroupe.com

cemarking@ctcgroupe.com

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France
Tél. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - ctclyon@ctcgroupe.com

Comité Professionnel de Développement Économique (CPDE) Cuir Chaussure Maroquinerie Ganterie
Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

blizz-z Handwerk Direkt GmbH

**MANUFACTURER'S TECHNICAL FILE TO THE
PPE REGULATION 2016/425**

Reference of the product

:

**194508, 194509,
194510, 194511**

Article code

:

/

Technical file index

:

01

Last update

:

NOVEMBER 2023

IDENTIFICATION

Reference of the product :	:	194508, 194509, 194510, 194511
Article code :	:	/
Basic Model		
Technical file index :	:	01
Last update :	:	NOVEMBER 2023

Manufacturer :

blizz-z Handwerk Direkt GmbH

Sommerauer Str. 14 | 91555 Feuchtwangen

Germany

tel : +49 09852 616219-0

fax : +49 09852 616219-0

Factory :

SHANDONG XINRUIDA LABOR PROTECTIVE PRODUCTS CO., LTD

NORTH OF WEIJIAO ROAD, EAST OF KANGCHENG STREET, ECONOMIC
DEVELOPMENT ZONE, GAOMI CITY, SHANDONG

CHINA

tel: +86-536-2580591

fax: +86-536-2580591

GLOVE DESCRIPTION

General glove description and intended use:

15 gauge nylon and spandex liner, with black nitrile coating, sandy finish

This glove is designed against mechanical risks.

Type of coating finish : sandy

Visual description (picture back and palm sides) :



Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)

		Applicable	Covered by
§1	Requirements defined in the Annex II §1 are applicable to all PPE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§1.4	Manufacturer's instructions and information is available	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking
§2.5	PPE which may be caught up during use	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§3.3	The PPE is intended to protect against mechanical injuries	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking

Glove constitution :

	Reference	Color	Material	Surfacic mass (g/m ²)	Gauges	Thickness
Palm		Black	Nitrile sandy	440g/m ²		1mm
		Grey	Nylon and Spandex	200g/m ²	15 Gauges	
Back		Grey	Nylon and Spandex	200g/m ²	15 Gauges	
Cuff		grey/ white	Polyester + elastic	296g/m ²	13 Gauges	
Binding		black	polyester			

PROTECTION SCOPE

This glove meets the essential requirements of the Personal Protective Equipment Regulation 2016/425.

This glove is designed against mechanical risks.

It is a category II product.

GENERAL REQUIREMENTS

Standard EN ISO 21420 : 2020

Dexterity : 5

Available size range: 8/M(194508), 9/L(194509), 10/XL(194510), 11/XXL(194511)

The hand sizing system is based on hand circumference and hand length as defined in EN ISO 21420 Annex B table B.1

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

Mechanical hazard EN 388:2016 + A1:2018

Protection offered	Performance levels
Abrasion resistance	4
Blade cut resistance	1
Tear strength resistance	2
Puncture resistance	1
Cut Resistance method (EN ISO 13997)	X
Impact Protection	N/A

The levels of performance have been measured on the palm.


TEST REPORTS

Laboratory	CTC	Other
EN ISO 21420 + innocuousness	S210301582_1 S230301593_1 (DMFu) S191215616_1 S181115656_1	
EN 388	S230301775_2	

MARKING - PACKAGING

Information printed on the glove :

Logo of Manufacturer :

Logo 

Glove's reference : 194508, 194509, 194510, 194511

Article Code : /

Size indicator

Pictograms related to risks against which protection is offered with performance levels


Information pictogram

Address of Manufacturer :

Date of Manufacture (month/year) and/or serial/batch number :

Date of obsolescence (month/year) if applicable:

Marking example :

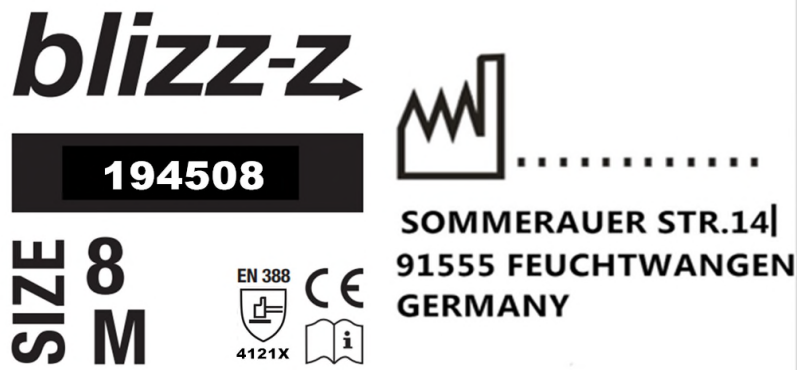

Method of marking on the glove :

INK PRINTING LOGO ON THE BACK OF GLOVES and label

Packaging suitable for transport:

12 PAIRS/POLYBAG, 120 PAIRS/CTN.

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

Cleaning instructions:

The gloves are not washable.

MEANS OF CONTROL

First is the incoming quality control, which is very important in purchasing the yarn. This is the primary control point to stop the defective materials into the productive process. Through some physical methods, such as visual, touch, compare with the samples, the best quality of yarns will be choosed for gloves.

Second is the inprocess quality control. The deployment of PU, the selection of gloves, the make of model, the print on the back of gloves and so on are the inprocess quality control. That means the quality control activities after the storage of materials and before the warehousing of finished goods. And the quality of the testing phase is called final quality control.

Finally is the outgoing quality control. When the goods are finished, the workers will choose the defective goods out. And that will be kept records. The quality record can provide objective evidence about the goods quality. SIZING test under EN ISO 21420 will be checked on a weekly basis. ABRASION RESISTANCE test under EN388 will be checked on a monthly basis. Other items will be checked on a yearly basis.

INSTRUCTIONS FOR USE

blizz-z Handwerk Direkt GmbH

Sommerauer Str. 14 | 91555 Feuchtwangen

Germany

Glove reference : 194508, 194509, 194510, 194511

Article code: /

User notice index : 01

Last update : NOVEMBER 2023

Glove description :

15 gauge nylon and spandex liner, with black nitrile coating, sandy finish

This glove is a personal protective equipment belonging to the category II.

It meets the requirements of the PPE Regulation 2016/425 : innocuousness, comfort, solidity.

It has been subject to a UE-type Examination performed by :

C.T.C. (0075)
4, rue Hermann Frenkel
69367 LYON Cedex 07
FRANCE

blizz-z

194508

SIZE 8 M



SOMMERAUER STR.14|
91555 FEUCHTWANGEN
GERMANY

The glove meets the requirements of the standard EN ISO 21420:2020 « Protective Gloves - General requirements and test methods ».

Dexterity: 5

Available size range: 8/M(194508), 9/L(194509), 10/XL(194510), 11/XXL(194511)

The hand sizing system is based on hand circumference and hand length as defined in EN ISO 21420 Annex B.

Information about marking

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.



The CE marking means that this product meets the requirements of the regulation 2016/425

Mechanical hazard - EN 388:2016 + A1:2018



4 1 2 1 X
Levels of performance

Abrasion resistance	4	(on 4 maxi)
Blade cut resistance	1	(on 5 maxi)
Tear resistance	2	(on 4 maxi)
Puncture resistance	1	(on 4 maxi)
Cut Resistance method (EN ISO 13997)	X	(A to F)
Impact Protection		



Read carefully the instructions for use provided with the product

Protection limit :

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

The protection against risks or hazards which are not mentioned in this document is not warranted.

These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated.

Before use, the glove shall be visually inspected for any defect or imperfections. In case of deterioration, the gloves must be scrapped (abrasion, cut, tear...).

For gloves with two or more layers the overall classification does not necessarily reflect the performance of the outermost layer.

The levels of performance against mechanical risks are only valid for the palm of the glove.

Storage and cleaning notice

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.

The gloves are not washable.

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

Declaration of conformity :

Available with product.